

- Ultra-miniature SMD package 2.5 x 2.0 x 0.8mm
- Stability from  $\pm 0.5\text{ppm}$  over  $-20^\circ$  to  $+70^\circ\text{C}$
- Supply Voltage 1.8V, 2.5V or 2.8Volts
- Miniature, lightweight and compact
- Ideal for portable devices such as GPS and handsets



### SPECIFICATION

<b>Product Series</b>		M22S (Refer to EM22S if voltage control function is not required.)	
<b>Output Wave Form:</b>		Clipped Sine Wave	
<b>Supply Voltage</b>		1.8V $\pm 5\%$ (1.71V ~ 1.89V)	2.5V $\pm 5\%$ (2.37V ~ 2.62V)
<b>Frequency Range:</b>		13.0MHz to 52.0MHz	
<b>Initial Calibration Tolerance:</b>		$\pm 2\text{ppm}$ maximum, $+25^\circ\text{C}$ , 1 hour after reflow	
<b>Frequency Stability</b>		From $\pm 0.5\text{ppm}$ to $\pm 2.5\text{ppm}$ over operating temperature range. Referenced to frequency reading at $25^\circ\text{C}$ .	
vs Temperature:		See table below for availability	
vs Ageing:		$\pm 1.0\text{ppm}$ maximum, first year at $25^\circ\text{C}$	
vs Voltage Change:		$\pm 0.2\text{ppm}$ maximum for a $\pm 5\%$ voltage change	
vs Load Change:		$\pm 0.2\text{ppm}$ maximum for a $\pm 10\%$ load change	
vs Reflow:		$\pm 1.0\text{ppm}$ maximum for 1 reflow and measured after 24 hours	
<b>Output Voltage Level (Peak to peak):</b>		0.8V p-p min., 2.0V p-p max. Load $10\text{k}\Omega//10\text{pF} \pm 10\%$	
<b>Output Format:</b>		DC coupled. See below for output waveform. Requires an external AC-Coupling capacitor at pin 3, 1000pF recommended.	
<b>Current Consumption:</b>		fo < 26MHz: 2mA max. fo > 26MHz: 2.5mA max.	
Pin 1	VCTCXO only	Control Voltage (VCON):	0.9V (centre) $\pm 0.6\text{V}$   1.4V (Centre) $\pm 1.0\text{V}$
		Frequency Deviation Range (Pullability):	$\pm 5\text{ppm}$ minimum
		Linearity:	$\pm 10\%$ maximum
		Slope Polarity:	Positive Slope (A positive voltage change increases frequency)
		Input Impedance:	$500\text{k}\Omega$ minimum
<b>Startup Time:</b>		2ms max. (to reach 90% amplitude and at $25^\circ\text{C} \pm 2^\circ\text{C}$ )	
<b>Packaging:</b>		8.0mm tape; 4.0mm pitch; 180mm reel; 1000 pieces (code P1) or 3000 pieces (code P3) per reel. Cut tape for <1k pieces.	


### AVAILABLE FREQUENCY STABILITY vs OPERATING TEMPERATURE RANGE

Frequency Stability (ppm)		$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	$\pm 2.0$	$\pm 2.5$
Temperature Range ( $^\circ\text{C}$ )	0 ~ +50	✓	✓	✓	✓	✓
	-10 ~ +60	✓	✓	✓	✓	✓
	-20 ~ +70	✓	✓	✓	✓	✓
	-30 ~ +75	ASK	✓	✓	✓	STD
	-40 ~ +85	ASK	ASK	✓	✓	✓

✓ = available, STD = standard, ASK = call Technical Sales

### OUTPUT WAVEFORM

Waveform at Pin 3 - Clipped Sine Wave

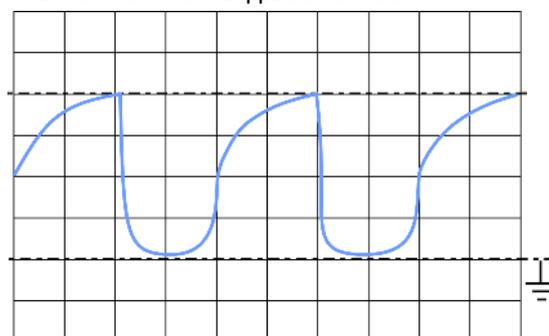


Before AC-coupling capacitor

### ENVIRONMENTAL PERFORMANCE SPECIFICATION

Environmental Approvals:	RoHS Compliant, Pb (lead) free, Free of Cadmium, Hexavalent Chromium, Lead, Mercury, PBBs and PBDEs
Moisture Sensitivity Test:	MSL = 1 per IPC/JEDEC J-STD-020D.1
Humidity:	85% RH, 85°C, 48 hours
Hermeticity, Fine Leak:	MIL-STD-883, method 1014, condition A
Hermeticity, Gross Leak:	MIL-STD-883, method 1014, condition C
Solderability:	MIL-STD-202F, method 208E
Vibration:	MIL-STD-883, method 2007, condition A, 10~2000Hz, 1.52mm 20g, each axis for 4 hours
Mechanical Shock:	MIL-STD-883, method 2002, condition B, 1500g, 1/2 sine, 0.5ms, each axis 3 times
Resistance to Solvent:	MIL-STD-202, method 215
Resistance to Soldering Heat:	MIL-STD-202, method 210
Temperature Cycling:	MIL-STD-883, method 1010
Thermal Shock:	MIL-STD-883F, method 1011.9, Condition B -55~+125°C, 10 min soak time, 200 cycles
H.A.S.T. (Highly Accelerated Stress Test):	JESD22-A110
Storage Temperature Range:	-55° ~ +125°C
ESD Protection:	1.5kV min., human body model.
Solder Pad Surface Finish:	Gold (Au) (0.3~1.0µm) over nickel (Ni) (1.27~8.89µm)
Second Level Interconnect Category:	e4
Unit Weight:	0.12gm

### VEM22S - OUTLINES AND DIMENSIONS

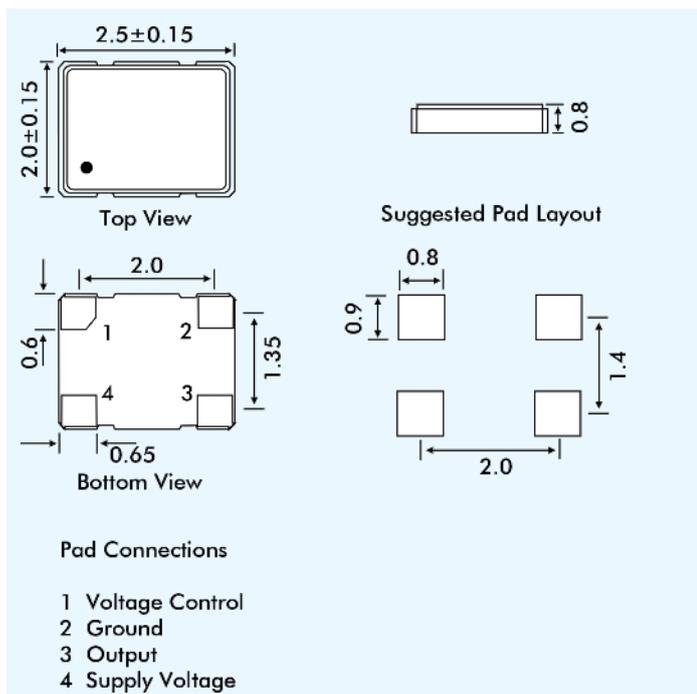

### PART NUMBERING PROCEDURE

